




2P/24V(135A) coil (VG 96927-12)

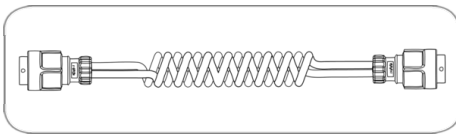

Art.Nr.
Part. No.

651835

Product group	Coil
Industry	Defense vehicles
No. of poles	2
Voltage [in V]	24
Rated current / permanent load [in A]	135.0
Peak current / short-term load [in A]	245.0
Standard	VG 96927-12
Special feature	nested cable, with rubberized metal screw ring (black)
Packaging	PE bag
No. of connected plugs	2
No. of connected sockets	0
Design/Version	rubberized
Housing material	break-proof metal
Housing color	black
Contact insert color	black
Cable outlet	cap nut
Contact version	contact pin
Contact surface	silver (Ag)
Contact termination	solder contact, crimp contact
Contact: for max. wire cross section [in mm²]	35.0
Type of seal	sealing plug
No. of seal outlets	double
Max. working length [in m]	4.0
Outer coil diameter [in mm]	70.0
Cable color	black/red
Wire cross-sectional area	2x 35.0mm²
Protection	IP X4,IP X7,IP 54
Temperature resistance [in °C]	-40.0 - 80.0