




## 2P/24V(135A) coil (VG 96927-12)

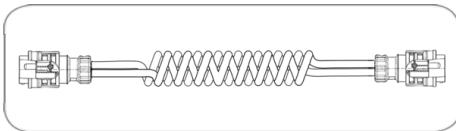

Art.Nr.  
Part. No.

652092

|  |  |
|--|--|
| Product group  | Coil   |
| Industry   | Defense vehicles                                   |
| No. of poles   | 2  |
| Voltage [in V]   | 24   |
| Rated current / permanent load [in A]                      | 135.0  |
| Peak current / short-term load [in A]                      | 245.0  |
| Standard   | VG 96927-12  |
| Special feature  | nested cable, with metal screw ring (bronze green) |
| Packaging  | PE bag   |
| No. of connected plugs                                     | 2  |
| No. of connected sockets                                   | 0  |
| Housing material   | break-proof metal                                  |
| Housing color  | bronze green (RAL 6031-F9)                         |
| Contact insert color                                       | black  |
| Cable outlet   | cap nut  |
| Contact version  | contact pin  |
| Contact surface  | silver (Ag)  |
| Contact termination  | solder contact, crimp contact                      |
| Contact: for max. wire cross section [in mm <sup>2</sup> ] | 35.0   |
| Type of seal   | sealing plug                                       |
| No. of seal outlets  | double   |
| Max. working length [in m]                                 | 4.0  |
| Outer coil diameter [in mm]                                | 70.0   |
| Cable color  | black/red  |
| Wire cross-sectional area                                  | 2x 35.0mm <sup>2</sup>                             |
| Protection   | IP X4,IP X7,IP 54                                  |
| Temperature resistance [in °C]                             | -40.0 - 80.0                                       |